


L-3 COMMUNICATIONS INFRARED PRODUCTS

THERMAL-EYE DVS CONFIGURATIONS

Lens	Camera Configuration	P/N
24° X 18° Fixed Focus w/passive athermalization	<p>A-Kit: Sensor module mounting bracket for HET; DCM mounting bracket; power cable; DCM/SM interface cable and mounting hardware.</p> <p>B-Kit: Sensor Module (24° FOV; 320 x 240 BST detector, single ended video (NTSC Only), 16-36VDC operation); Display/Control Module (640 x 480 LCD display; 16-36VDC operation)</p>	1000434-0001
24° X 18° Fixed Focus w/passive athermalization	<p>A-Kit: Sensor module mounting bracket for HEMTT/PLS; DCM mounting bracket; power cable; DCM/SM interface cable and mounting hardware.</p> <p>B-Kit: Sensor Module (24° FOV; 320 x 240 BST detector, single ended video (NTSC Only), 16-36VDC operation); Display/Control Module (640 x 480 LCD display; 16-36VDC operation)</p>	1000441-0001
24° X 18° Fixed Focus w/passive athermalization	<p>A-Kit: Sensor module mounting bracket for HMMWV; DCM mounting bracket; power cable; DCM/SM interface cable and mounting hardware.</p> <p>B-Kit: Sensor Module (24° FOV; 320 x 240 BST detector, single ended video (NTSC Only), 16-36VDC operation); Display/Control Module (640 x 480 LCD display; 16-36VDC operation)</p>	1000447-0001
45° X 35° Fixed Focus w/passive athermalization	<p>A-Kit: Sensor module mounting bracket for HET; DCM mounting bracket; power cable; DCM/SM interface cable and mounting hardware.</p> <p>B-Kit: Sensor Module (45° FOV; 320 x 240 BST detector, single ended video (NTSC Only), 16-36VDC operation); Display/Control Module (640 x 480 LCD display; 16-36VDC operation)</p>	1000434-0002
45° X 35° Fixed Focus w/passive athermalization	<p>A-Kit: Sensor module mounting bracket for HEMTT/PLS; DCM mounting bracket; power cable; DCM/SM interface cable and mounting hardware.</p> <p>B-Kit: Sensor Module (45° FOV; 320 x 240 BST detector, single ended video (NTSC Only), 16-36VDC operation); Display/Control Module (640 x 480 LCD display; 16-36VDC operation)</p>	1000441-0002
45° X 35° Fixed Focus w/passive athermalization	<p>A-Kit: Sensor module mounting bracket for HMMWV; DCM mounting bracket; power cable; DCM/SM interface cable and mounting hardware.</p> <p>B-Kit: Sensor Module (45° FOV; 320 x 240 BST detector, single ended video (NTSC Only), 16-36VDC operation); Display/Control Module (640 x 480 LCD display; 16-36VDC operation)</p>	1000447-0002

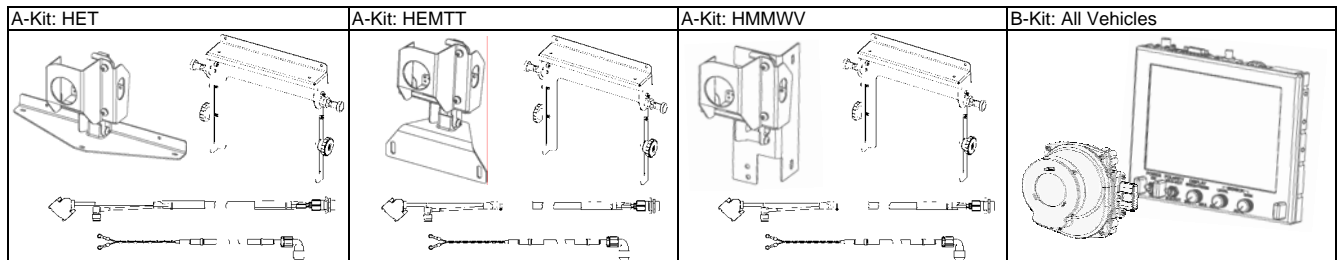

L-3 Communications Infrared Products, P.O. Box741148 M/S 37, Dallas, TX 75374-1148